


RELAY MODULE

DESCRIPTION

The Relay Module (CRM4), P/N 10-2204, provides 4 additional independently programmable relays. CyberCat, Cheetah Xi, or SHP PRO Control Panels can support up to 2 CRM4 modules (if other options are not used) on the main controller board. Each relay may be wired across normally open or normally closed contacts. It interfaces to the main control board using four standoffs supplied with the CRM4.

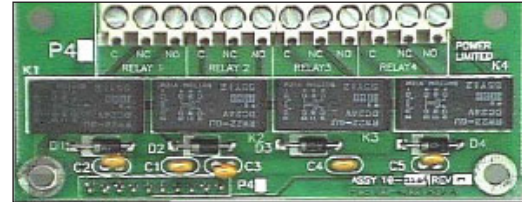


Note: The CyberCat 50 and Cheetah Xi 50 control systems are not compatible with this product.

SPECIFICATIONS

Standby Current:	11mA
Alarm Current:	0.010A per relay
DC Rating:	2A @ 30 VDC
AC Rating:	0.5A @ 120 VAC
Dimensions:	3-1/2" L x 1-1/2" H x 2" D
Weight:	0.10 lbs
Operating Temp:	32°F to 120°F
Operating Humidity:	93% RH, non-condensing

WIRING DIAGRAM

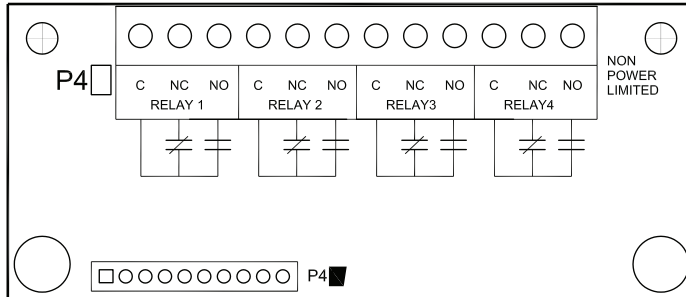

APPROVALS

- UL - S2203
- FM - OB4A7AY
- MEA - 307-05-E (Cheetah Xi)
461-04-E (SHP-Pro)
490-04-E (CyberCat)
- CSFM - 7165-0900:137 (CyberCat)
7165-0900:149 (Cheetah Xi)
7165-0900:135 (SHP PRO)
- City of Denver
- City of Chicago

Form No. D.1.14.01-2

(This page is left blank intentionally)

