

MOXA ENCLOSURE KITS

Important Notices

1. Please read the instructions carefully! Fike products are used for the protection of life and critical assets if installed and tested as described in this document.
2. Do not use Fike products for any application for which it is not intended. Fike shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Fike product for which the product is not intended by Fike.
3. Do not use Fike products described in this document outside of the ranges specified by Fike. Fike shall have no liability for malfunctions or damages arising out of the use of Fike products beyond such specified ranges.
4. Fike reserves the right to change product designs or specifications without obligation and without further notice.
5. This document is subject to Fike's full disclaimer at <http://www.fike.com/disclaimer>.
6. Visit www.fike.com to contact us or to download the latest version of this document.

Important Safety Notes

The following formats are used for safety notes in these instructions.



WARNING

This type of note is used to indicate the presence of a hazard which will or may cause personal injury or death, or loss of service if safety instructions are not followed or if the hazard is not avoided.



CAUTION

This type of note is used to indicate the presence of a hazard which will or may cause damage to the equipment if safety instructions are not followed or if the hazard is not avoided.

NOTE

Indicates the message is important, but is not of a Warning or Caution category. These notes can be of great benefit to the user and should be read.

Specifications

Construction	16 or 14 gauge carbon steel with continuously welded seams
Finish	Standard RAL 7035 texture polyester power coat finish on exterior and interior
Dimensions (H x W x D)	10-2936: 6 x 6 x 6 in [152 x 152 x 152 mm]
	10-2937: 10 x 8 x 6 in [254 x 203 x 152 mm]
	10-2938: 14 x 8 x 6 in [356 x 203 x 152 mm]
Shipping weight	10-2936: 5 lbs. [2.3 kg]
	10-2937: 9 lbs. [4.1 kg]
	10-2938: 12 lbs. [5.4 kg]
Sub panel size (H x W x D)	10-2936: 4.88 x 4.88 in [124 x 124 mm]
	10-2937: 8.88 x 6.88 in [226 x 175 mm]
	10-2938: 12.88 x 6.88 in [327 x 175 mm]
MOXA converter qty.	10-2936: 2 converters
	10-2937: 4 converters
	10-2938: 6 converters

Select Enclosure Mounting Location

The following guidelines must be adhered to when selecting the mounting location for the MOXA enclosure(s):


1. The MOXA converter must be mounted within 20 ft. (6.1m) of the Fike panel or device the converter is to be connected to.
2. Allow sufficient clearance around the enclosure to allow door to swing open.
3. Mount the enclosure at a height that allows easy access to the MOXA components for maintenance and service.
4. Mount the enclosure on a surface that is vibration free, clean, and dry using the mounting flanges provided on the enclosure.
5. Mount the enclosure in an area that is free from sources of electromagnetic interference and radio frequency interference as they could adversely affect the operation and useful life of the MOXA components.
6. Mount the enclosure in an environment with a nominal room temperature of 0-49°C (32-120°F) with a maximum relative humidity of 93%.

Installation

1. Remove the enclosure from the shipping box and check for damage.
2. Open the enclosure and remove the sub-panel and screw kit (P/N 02-11082).
3. Determine the location for conduit connections to the enclosure.
4. Mark and drill the holes for conduit connection(s). Remove all burrs and sharp edges.
5. Using suitable anchors, secure the enclosure to the mounting surface using the four mounting holes provided on the enclosure.
6. Connect conduit to enclosure.
7. Thoroughly clean the inside of the enclosure before proceeding with the installation of the MOXA converters.
8. Install and wire MOXA converter(s) into the enclosure. Refer to Fike document 06-803 for installation instructions.
9. Perform system tests.
10. Secure the enclosure door in the closed position with the mounting clamp and screw.

NOTE

Fike recommends that all penetrations be made towards the front of the enclosure (door side) to avoid interference with the MOXA converters (once installed). No penetrations shall be made in the door or back of the enclosure.

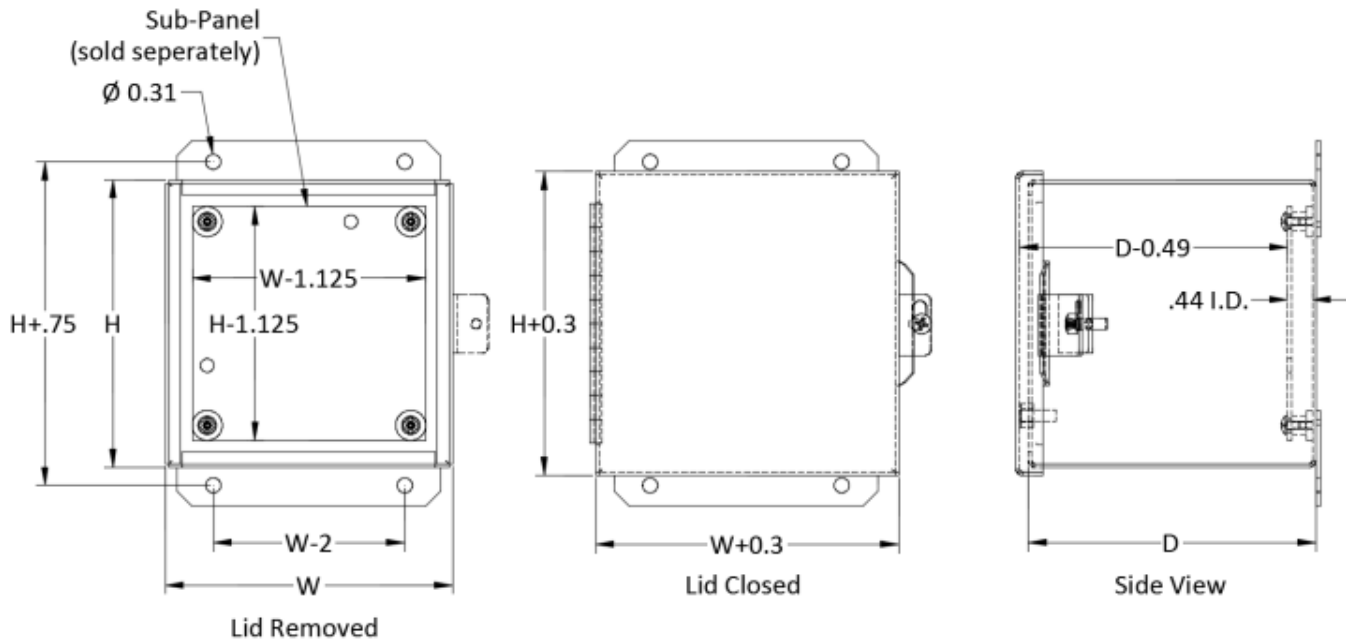

Enclosure Dimensions

(When H or W is equal to or less than 8" (203 mm) there will be one set of door clamps.)