




## DESCRIPTION

The 10-2756, Fire-phone Housing (See Exhibit 1) can be used in conjunction with the Digital Paging Card (P/N 10-2727) to provide firefighter's phone capability throughout the facility.

The housing consists of an 18 gauge steel enclosure with a baked on enamel finish (red or black), firefighter's phone and connection cable. The housing is designed to be mounted inside the Fire Command Center enclosure using hardware provided.

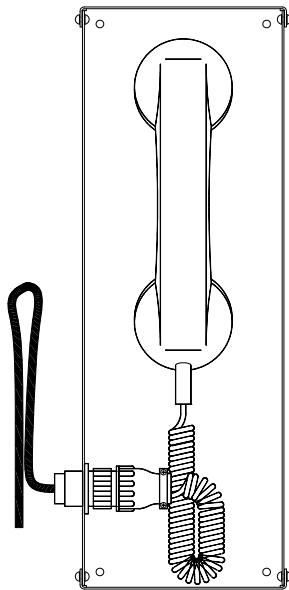

**Exhibit 1: Fire-phone Housing**

## ORDERING OPTIONS


Part Numbers: 10-2756-**C** (**C** = Red or **B**Black)

The following parts are supplied with the housing:


02-12798	Standoff Kit
02-10347	#6-32 hex standoff, 1.185" M/F (qty. 4)
02-1879	#6-32 hex nut (qty. 4)
4153-142	#6 lock washer (qty. 4)

## INSTALLATION


1. If the system is already powered, disable critical functions; then power down system.
2. Locate press studs in the enclosure back-box for mounting the housing (See Exhibit 2).
3. Install the four M/F standoffs provided onto the threaded press studs (See Exhibit 3).
4. Position the fire-phone housing onto the standoffs and secure using the four washers and nuts provided (See Exhibit 3).
5. Connect cable to Digital Paging Card (See Exhibit 4).

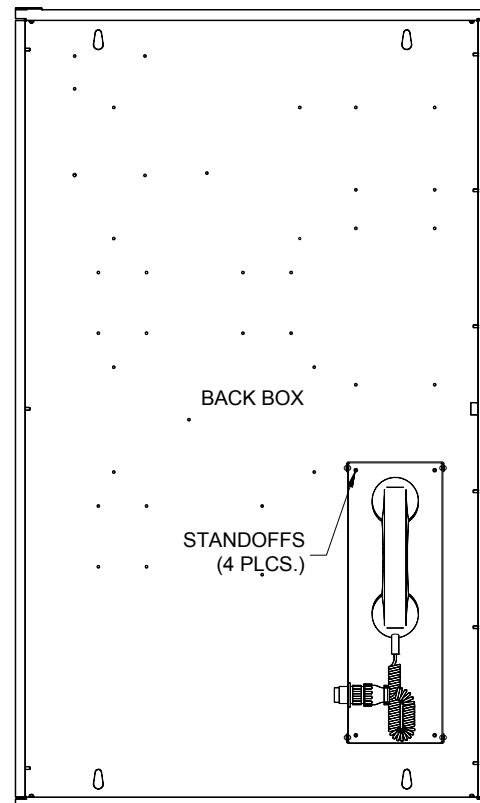

**Exhibit 2: Mounting Location - FCC Enclosure**

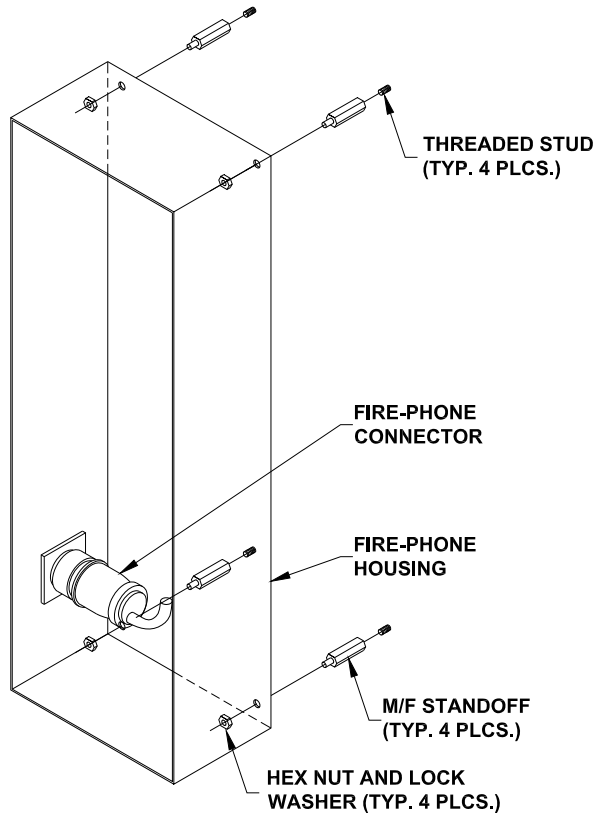

**Exhibit 3: Housing Installation**

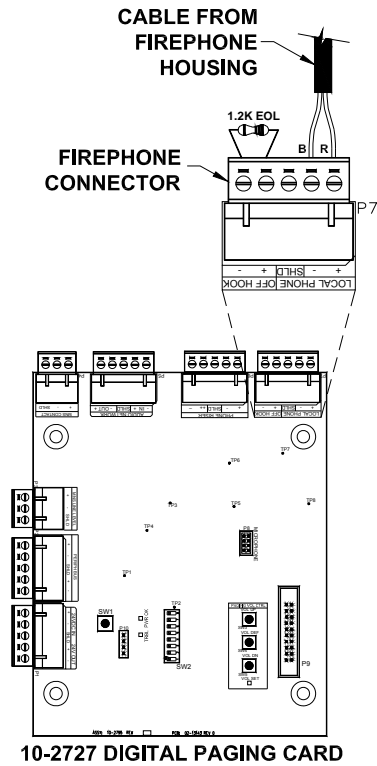

**Exhibit 4: Fire-phone Connection to Digital Paging Card**