

## FIREFIGHTER PHONE JACK

### DESCRIPTION

The Firefighter's Phone Jack (P/N 24-133) allows a firefighter to plug a Portable Handset (P/N 24-134) into the phone jack and communicate with other personnel connected to Fike's Emergency Communication System (ECS). The phone jack can be wired directly to the Digital Paging Card (P/N 10-2727) where a simple fire phone (direct party line) system is required or to a Firefighter Phone Module (P/N 24-135) where selectable phone use is required.

### FEATURES

- Mounts quickly to a single gang device box (min 1 3/4" depth)
- Optional single gang Decora® plate (sold separately)
- Mounting hardware included
- Terminal block mounting of TIP and Ring wires
- Noise filter on PCB
- Dimensions: 2-3/4" wide x 4-1/2" high x 1-1/2" deep (7 cm wide x 11.4 cm high x 3.8 cm deep)

### ORDERING INFORMATION

Fike P/N	Mfg. P/N	Description
24-133	IAMFFPJAC	Firefighter's Phone Jack
24-137	IGP1R	Single Gang Decora Plate (Red)




### APPROVALS:


- UL - UOXX.S2580



**WIRING DIAGRAMS**

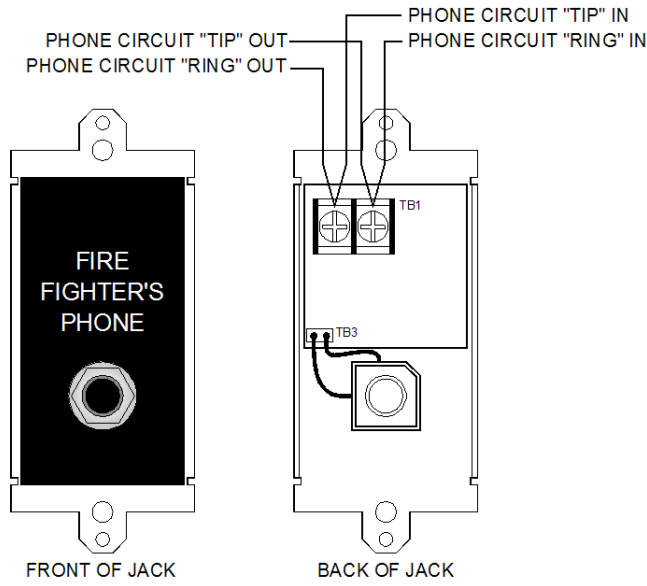

**Direct Party Line**

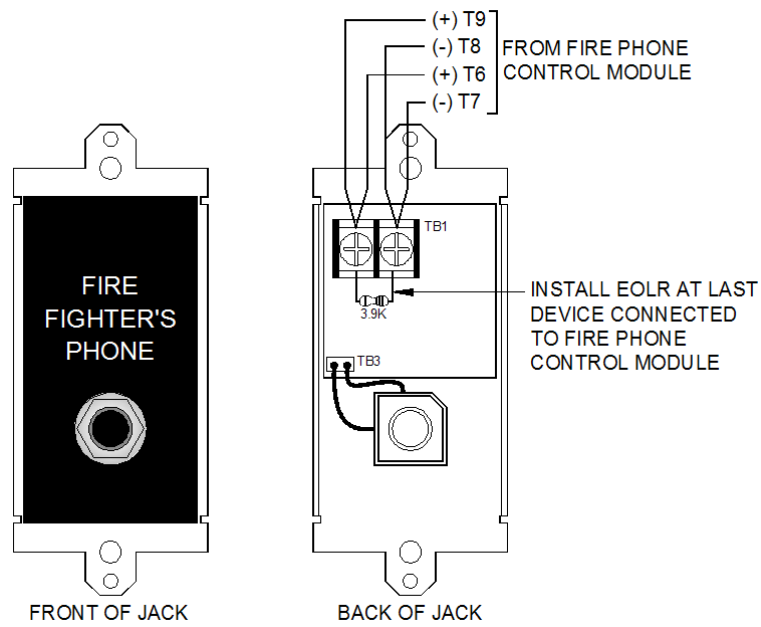

**Selective Talk**